

ASSEMBLY
OPERATION
REPLACEMENT PARTS

Demco


Glide Ride Pin Plate

Doing Our Best to Provide You the Best

GLIDE RIDÉ PIN PLATE REPLACEMENT



1. Remove 1/2" bolt from pin plate using 3/4" wrench or socket. **NOTE: Replace one side at a time to prevent skid plate from falling out.**

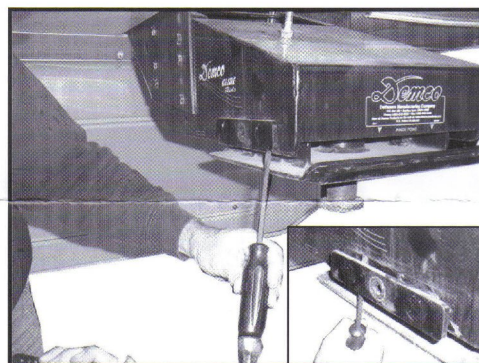

2. Using a flat screw driver or thin chisel and hammer, tap between pin plate and Glide Ride box on bottom to get pin plate started coming out. Pry pin plate out by going from side to side by the 1" pin until pin plate can be totally removed



3. Install the new yellow plated pin plate where old one was previously removed. Note: Inner skid assembly may have fallen down slightly when pin was removed. This assembly may have to be pushed up to get pin plated aligned with inside links.



4. Tap pin plate tight against Glide Ride box and reinstall previously removed 1/2" bolt and tighten to 85 ft-lbs.